


TORK-KV 906 Series Flanged Stainless Steel Ball Valve 3/2 Way

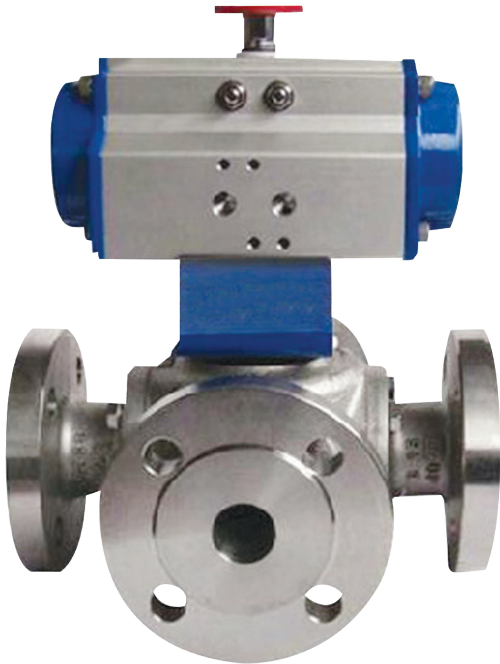

Flanslı bağlantılı, paslanmaz gövdeli, karıştırıcı vana veya pnömatik aktüatörlü, üç yollu küresel vanalı, kontrol vanası serimizdir.

DA	: Çift etkili aktüatörlü,
SR	: Tek etkili aktüatörlü, küresel vana.
Kullanıldığı Yerler	: Su, sıcak su, basınçlı hava, yağlar, korosif olmayan kiskanlar, hidrokarbonlar, gas.

TORK Actuator Details

BoBody	: Aluminum extrusion, eloxal coated surface, hard anodized.
Cover	: Aluminium injection, blue color, electrostatic dye.
Pistons	: Aluminium injection
Supply air	: 4-6 bar pressured air
Indicator	: Red color valve open-close indicator on every actuator available.
Connections	: Valve connection ISO5211, solenoid valve, switch box, positioner connection Namur

TORK Valve Details

Body	: Full pass, AISI 316 stainless steel, three piece
Ways	: 3/2 ways, can be mounted in any position, and gives flow in two directions.
O-ring	: PTFE around the ball and throat oring (two) PTFE
Pressure	: Low pressure and high pressure
Working Temperature	: -20...180 °C
Working Pressure	: PN25 ,PN 40 bar(NW15.....NW250)
Test	: All valves are tested at 20 bar for 48 hours

TORK-PAV 906.DA Double Acting Pneumatic Actuated
3 Way L type Flanged Stainless Ball Valve

Valve size	Valve Type No	Way	Pressure	Temperature	ISO Flanged Con. (Actuator Control)
NW15	TORK-PAV906.15DA	3/2	0-40 bar	-30..180 C	F03
NW20	TORK-PAV906.20DA	3/2	0-40 bar	-30..180 C	F03
NW25	TORK-PAV906.25DA	3/2	0-40 bar	-30..180 C	F03 /F04
NW32	TORK-PAV906.32DA	3/2	0-40 bar	-30..180 C	F04 /F05
NW40	TORK-PAV906.40DA	3/2	0-40 bar	-30..180 C	F04 /F05
NW50	TORK-PAV906.50DA	3/2	0-40 bar	-30..180 C	F05
NW65	TORK-PAV906.65DA	3/2	0-40 bar	-30..180 C	
NW80	TORK-PAV906.80DA	3/2	0-40 bar	-30..180 C	
NW100	TORK-PAV906.100DA	3/2	0-40 bar	-30..180 C	

TORK-PAV 906.SR Spring Return Pneumatic Actuated
3 Way Flanged Stainless Ball Valve

Valve size	Valve Type No	Way	Pressure	Temperature	ISO Flanged Con. (Actuator Control)
NW15	TORK-PAV906.15SR	3/2	0-40 bar	-30..180 C	F03
NW20	TORK-PAV906.20SR	3/2	0-40 bar	-30..180 C	F03
NW25	TORK-PAV906.25SR	3/2	0-40 bar	-30..180 C	F03 /F04
NW32	TORK-PAV906.32SR	3/2	0-40 bar	-30..180 C	F04 /F05
NW40	TORK-PAV906.40SR	3/2	0-40 bar	-30..180 C	F04 /F05
NW50	TORK-PAV906.50SR	3/2	0-40 bar	-30..180 C	F05
NW65	TORK-PAV906.65SR	3/2	0-40 bar	-30..180 C	
NW80	TORK-PAV906.80SR	3/2	0-40 bar	-30..180 C	
NW100	TORK-PAV906.100SR	3/2	0-40 bar	-30..180 C	