

## Explosion Proof General Purpose Solenoid Valve SX1030 Series

### GENERAL FEATURES

- Wide pressure range, flow rate and orifis options.
- Solenoid valves are used with filters.
- Solenoid valves can be mounted in any position without affecting its operation, coil to be used in a vertical position.
- It is applicable for natural gas, lpg, methan, butane, propane, gas, noncorrosive gas. These are applicable for valve usage
- Operating Temperature: -10 °C / +160 °C
- No pressure difference is required.

### ELECTRICAL CHARACTERISTICS

Voltages Tolerance : AC -15%, +10% DC -5%, +10%  
 Frequency : 50 Hz (60 Hz...)  
 On request; Connector with LED, PWM Socket  
 Specify coil voltage with order.

### MATERIALS IN CONTACT WITH FLUID

Body : Brass  
 Internal Parts : Stainless Steel, Brass  
 Sealing : NBR on request ; EPDM, V TON  
 Shading Ring : Copper (EN 12735-1)  
 Seats, Core Tube, Springs: Stainless Steel

### OPTIONS

- Female connection: BSP; (On request NPT)
- Manual use on request.
  - On request CR-Ni coating.
  - On request PTFE coating.
  - On request Atex (exproof) coil.

### TECHNICAL FEATURES

Max Viscosity : 5°E (-37cST and mm ^2/s)  
 Response Time : Opening: 400-1600 ms  
 Closing: 1000-2000 ms

### SEALS FEATURES

NBR : -10°C...+80°C  
 EPDM : -10°C...+130°C  
 VITON : -10°C...+160°C  
 PTFE : -10°C...+160°C  
 RUBY : -10°C...+160°C




**NORMALLY CLOSED**

**2 WAY**

**PILOT OPERATED**

$\Delta P=0,5$

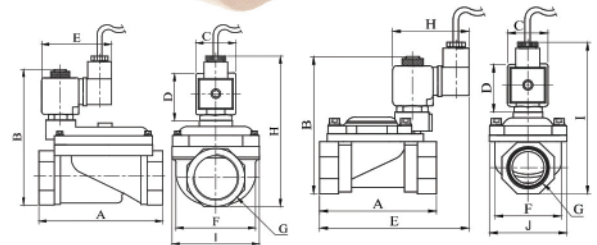

Dimensions (mm)									
G	A	B	C	D	E	F	J	H	I
3/8"	69	101	32	45	106.5	38	52	76	112
1/2"	69	104	32	45	106.5	40	52	76	112
3/4"	81.3	112	32	45	115.8	42.1	51.9	76	121
1"	87.9	119	32	45	112.4	51.5	60.9	76	121.5

Dimensions (mm)								
G	A	B	C	D	E	F	I	H
1 1/4"	141	147	32	45	76	96.5	110.7	156
1 1/2"	139	147	32	45	76	96.5	110.7	156
2"	145.6	157	32	45	76	96.5	110.7	165.5

Coils	Nominal Values	Cold/Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C41012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C41024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C41110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C41012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C41024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C41110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C41230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C41230VAC15VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/Order No	Connection Size	Orifis Size	Pressure min/max		Kv	Seal			Weight
				Bar	Bar		NBR	VITON	EPDM	
	SX1030	G	mm	Bar	Bar	l/min				kg
	SX1030.02	3/8"	12.5	0,35	16	45	✓	✓	✓	0,9
	SX1030.03	1/2"	12.5	0,35	16	65	✓	✓	✓	0,86
	SX1030.04	3/4"	20	0,5	16	120	✓	✓	✓	0,88
	SX1030.05	1"	25	0,5	16	170	✓	✓	✓	1,02
	SX1030.06	1 1/4"	46	0,5	12	390	✓	✓	✓	2,87
	SX1030.07	1 1/2"	46	0,5	12	460	✓	✓	✓	2,77
	SX1030.08	2"	46	0,5	12	580	✓	✓	✓	3,2
	SX1030.09	2 1/2"	72.8	1	6	1266	✓	✓	✓	6,2
	SX1030.010	3"	85.4	1	6	2333	✓	✓	✓	10,4

**Not:** Please look catalogues for more details.

### STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORQ solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).